

HENKOVAC TABLETOPS:

"FIRST CHOICE" FOR RESTAURANTS, HOSPITALITY INDUSTRY, FOOD VENDORS AND CATERERS.

Our plug and play table top machines have all the quality engineering and build of our industrial vacuum machines.

"PLUG & PLAY"



TABLETOP RANGE

SPECIFICATIONS TABLETOPS

Transparent cover & stainless steel chamber

	SEAL LENGTH	MAX. PRODUCT HEIGHT	USEFUL CHAMBER SIZE (wxdxh)	OUTSIDE DIMENSION (wxdxh)	STANDARD VOLTAGE*	POWER CONSUMPTION	WEIGHT
TABLETOP T2	280	110	280 x 310 x 110/140	360 x 500 x 340	230-1-50 Hz	0,4/0,5 kw	25 kg
TABLETOP T3	320	160	320 x 330 x 160	430 x 550 x 410	230-1-50 Hz	0,5/0,7 kw	50 kg
TABLETOP T4	420	180	max. 420 x 370 x 180	530 x 590 x 460	230-1-50 Hz	0,7/1,3 kw	60 kg
TABLETOP T5	320	100	900 x 330 x 100	990 x 530 x 430	230-1-50 Hz	1,3 kw	115 kg


Dimensions in mm *Machines can be supplied with all worldwide voltages applicable

OPTIONS TABLETOPS

	DIGITAL TIME CONTROL	SENSOR CONTROL	SEAL	SEAL CONFIGURATION	GAS	PUMP CAPACITY M3	CYCLE TIME
TABLETOP T2**	1 program	x	single double trenn	L	x	4 or 8 m ³	20-40 sec
TABLETOP T3	1 or 10 programs	sensor/H ₂ O	single double trenn	L	gas	8 or 16 m ³	20-30 sec
TABLETOP T4	1 or 10 programs	sensor/H ₂ O	double trenn 1-2	L L&L	gas	16 or 21 m ³	20-30 sec
TABLETOP T5	1 or 10 programs	sensor/H ₂ O	double trenn 1-2	S&S	gas	21 m ³	20-30 sec

**Model T2 standard coverheight 110 mm, optional high cover 140 mm

SEAL CONFIGURATIONS TABLETOPS

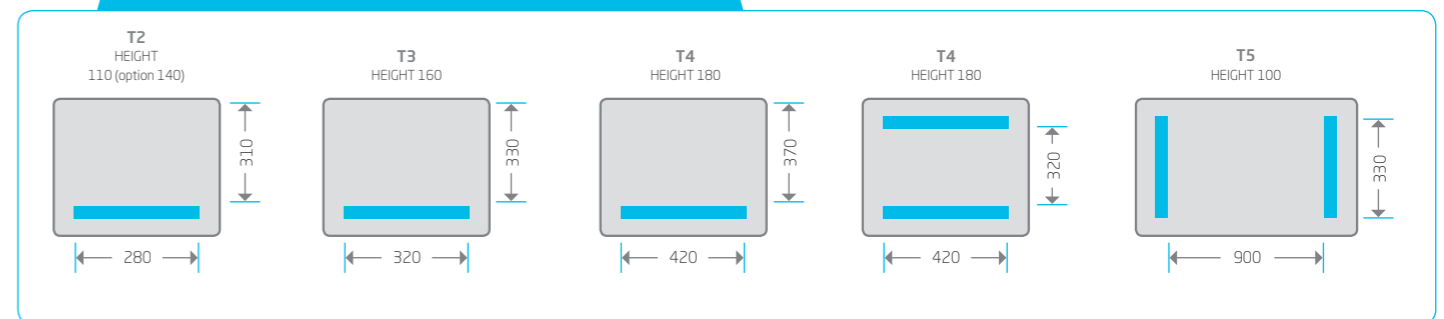

Dimensions in mm